

ML Series Datasheet

COMPACT WALL-MOUNTED SOLENOID-DRIVEN DOSING PUMP

General Information

Mytho's Hyperion ML Series is a simple solenoid dosing pump that manages dosing via microprocessor. Its external enclosure is IP65 rated to guarantee protection against water and dust ingress. The system features constant flow rate and is manually adjustable, with an LED relaying operational status according to dosing regulation.

- Steady green LED switches off with every stroke (pump running)
- Flashing green LED when the potentiometer is 0
- Steady red LED switches on with the low-level alarm

The pump head has a manual priming valve with flow rate manually or automatically (by signal input) adjustable from 0 (pump stop) to 100% of the maximum flow rate.

The ML Series can be wall mounted courtesy of the included fixing bracket or fitted on the top of a drum with an optional foot fixing bracket. This system can be used at up to 40°C ambient temperature and 90% humidity away from sun exposure and severe weather conditions.



Features


- Flow rates: 5 l/h @ 8 bar, 3 l/h @ 10 bar
- Power supply: 100÷240 Vac 50/60 Hz
- Stroke rate: 160 strokes/minute
- Pump head: PVDF
- Diaphragm: PTFE
- External enclosure: PP reinforced with IP65-rated ibreglass
- Manual priming valve
- Installation kit included

Applications


- Wastewater treatment
- Dairy
- CIP
- Fish farming
- Drinking water
- Cooling towers
- Boiler
- Reverse osmosis
- Galvanic industry
- Irrigation




ML Series Performance Curves

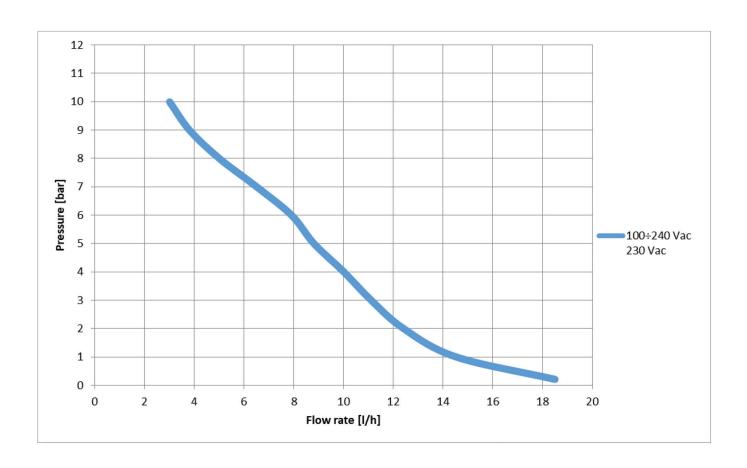

ML Series Overall Dimensional Drawing







M Series key code

