


RVS 304 buffertank zonder membraan geïsoleerd PU

Verticale tank 100 liter

Technische specificaties:

Connections				100 Liter
	H		Hoogte	995 mm
	ØD		Buiten diameter	470 mm
	Ød		Binnen diameter	370 mm
H	DN 14	G 3/4"	P&T valve	995 mm
B	DN 3	G 1 1/4"	Aansluiting (Inlet/Outlet)	800 mm
F	DN 9	G 1 1/4"	Aansluiting (Inlet/Outlet)	800 mm
C	DN 5	G 1/2"	Sensoren dompelbuis (1) (12,7mm))	700 mm
L	DN 6	G 1 1/2"	Elektrisch verwarmingselement	360 mm
D	DN 7	G 1/2"	Sensoren dompelbuis (2) (12,7mm))	300 mm
A	DN 4	G 1 1/4"	Aansluiting (Inlet/Outlet)	200 mm
E	DN 8	G 1 1/4"	Aansluiting (Inlet/Outlet)	200 mm
G	DN 2	G 1/2"	Aftapkraan	33mm
				AISI 304
				Isolatie Polyurethaan hardschuim CFK vrij
				50 mm
				Mantel boiler Frosted-metal, kleur lichtgrijs
				Max. bedrijfsdruk tank
				6 bar
				Max. bedrijfstemperatuur tank
				95°C
				Gewicht
				22 kg

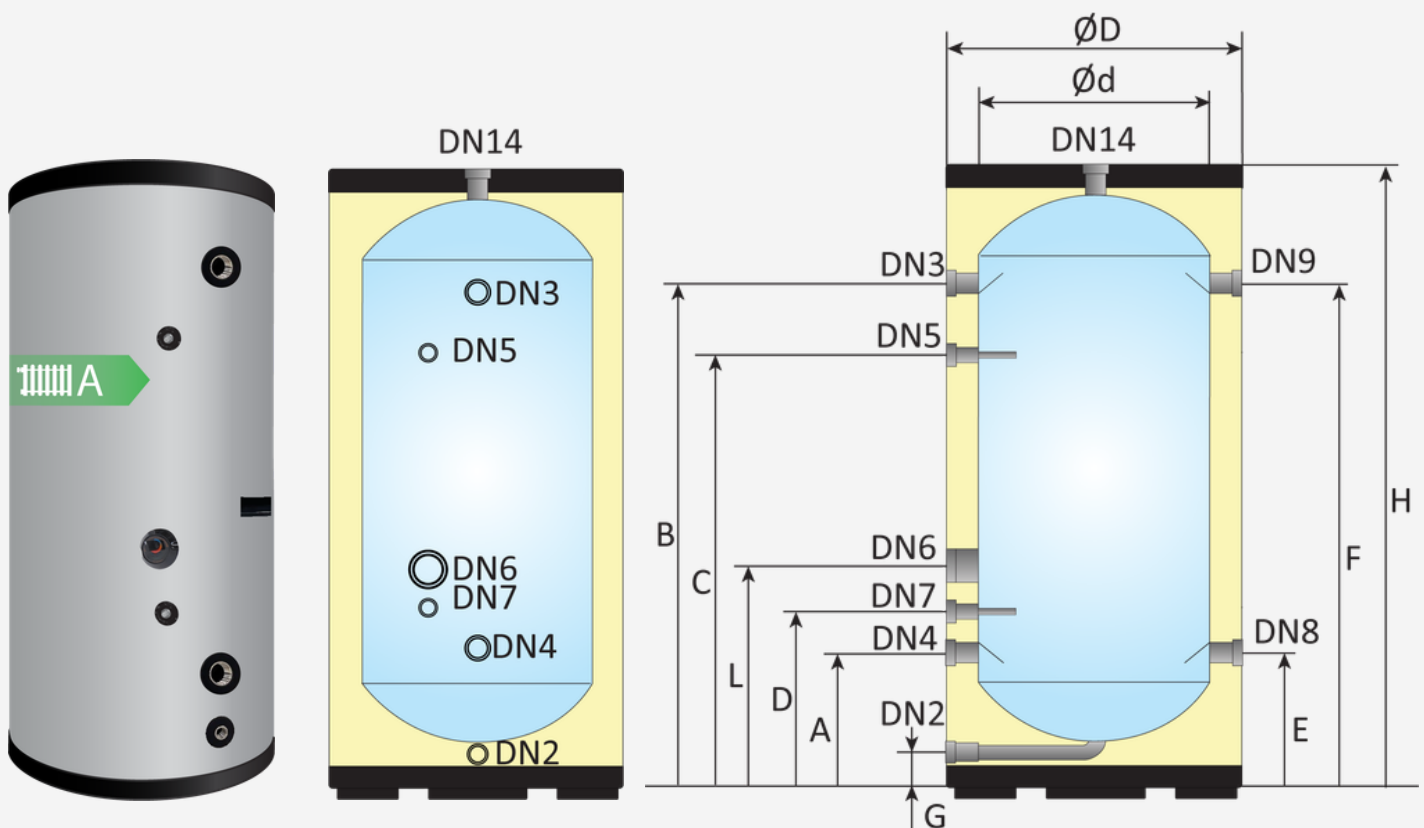

Vewi Techniek B.V.

KvK 17241490
IBAN: NL 20 RABO 0148 1967 80
BIC: RABONL2U

+31 (0)6 11 19 26 61
www.vewitechniek.nl
Verkoop@vewitechniek.nl
Weerscheut 11, 5381 GS Vinkel