


TRI36 36W TRI-PROOF BATTEN

SKU: TRI36

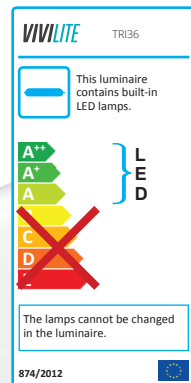

Product Specification

Wattage

36W

Lumen output

4,500lm

Lumen per Watt

125lm/W

Kelvin temperature

3600K

Length

5ft (1500mm)

Optical Data

LED Type	LG 2835
System Efficacy	125LM/W(CCT=3600K) ±5%
Luminous Flux	4500LM(CCT=3600K) ±5%
CCT	3600K
Beam Angle	120°
CRI	>80Ra
System Efficiency	>90%

Electrical Data

Power Supply	Osram
Input Voltage	220-250VAC
Dimmable	1-10V
Power Frequency	50/60Hz
Power Efficiency	>90%
Power Factor	>0.90


Emergency Kit (optional)

Backup Time	3 hours
Lumen Level	10%

Other

Body Material	PC	Luminaire Net Weight	2.1kg
Diffuser Material	PC	Life span	>50000Hrs LM70
Clip Material	Stainless Steel	Operating Temperature	-20°C~+35°C
Terminal Block	3P screw	Operating Humidity	15 - 90%
Ingress Protection	IP66	Dimensions	1568 x 100 x 82mm
Impact Protection	IK08		

Photometric Data

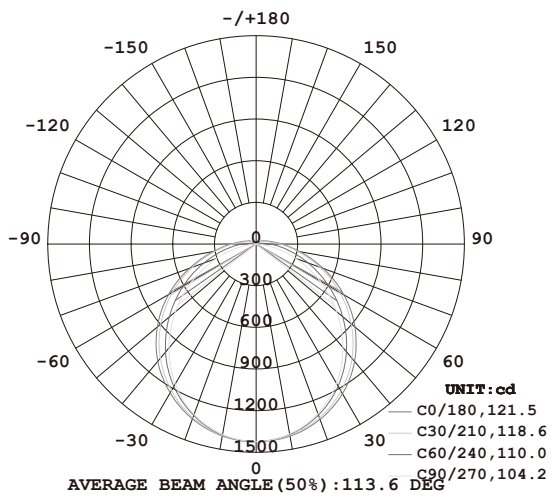

Height	Eavg, Emax	Angle: 104.07deg	Diameter
1m	497.8, 14241x		256.32cm
2m	124.4, 356.01x		512.64cm
3m	55.31, 158.21x		768.96cm
4m	31.11, 89.001x		1025.28cm
5m	19.91, 56.961x		1281.60cm
6m	13.83, 39.561x		1537.93cm
7m	10.16, 29.061x		1794.25cm
8m	7.778, 22.251x		2050.57cm
9m	6.145, 17.581x		2306.89cm
10m	4.978, 14.241x		2563.21cm

Dimensions

