




# TRI65 65W TRI-PROOF BATTEN

SKU: TRI65

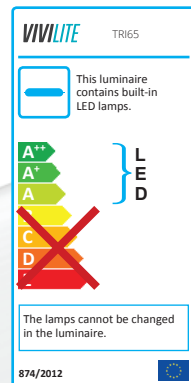

## Product Specification

Wattage	Lumen output	Lumen per Watt	Kelvin temperature	Length
65W	8,450lm	130lm/W	5700K	5ft (1500mm)

## Optical Data

---

LED Type	LG 2835
System Efficacy	130LM/W(CCT=5700K) ±5%
Luminous Flux	8450LM(CCT=5700K) ±5%
CCT	5700K
Beam Angle	120°
CRI	>80Ra
System Efficiency	>90%

## Electrical Data

---

Power Supply	Osram
Input Voltage	220-250VAC
Dimmable	1-10V
Power Frequency	50/60Hz
Power Efficiency	>90%
Power Factor	>0.90

## Emergency Kit (optional)

---


Backup Time	3 hours
Lumen Level	10%

## Other

---

Body Material	PC	Luminaire Net Weight	2.1kg
Diffuser Material	PC	Life span	>50000Hrs LM70
Clip Material	Stainless Steel	Operating Temperature	-20°C~+35°C
Terminal Block	3P screw	Operating Humidity	15 - 90%
Ingress Protection	IP66	Dimensions	1568 x 100 x 82mm
Impact Protection	IK08		

## Photometric Data

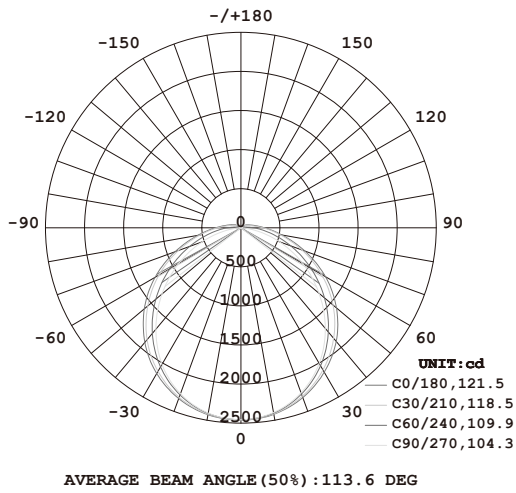

Height	Eavg, Emax	Angle: 104.20deg	Diameter
1m	860.7, 24601x		256.92cm
2m	215.2, 615.01x		513.84cm
3m	95.64, 273.31x		770.76cm
4m	53.80, 153.71x		1027.69cm
5m	34.43, 98.401x		1284.61cm
6m	23.91, 68.331x		1541.53cm
7m	17.57, 50.201x		1798.45cm
8m	13.45, 38.441x		2055.37cm
9m	10.63, 30.371x		2312.29cm
10m	8.607, 24.601x		2569.22cm

## Dimensions

