

ETKD-M / ETWD-M

Single-jet dry dial meter for cold and hot water

The ETKD-M / ETWD-M is a single-jet meter with a modular 8-digit register with protected magnetic coupling.

The individual advantage of the ETKD-M / ETWD-M is an exceptionally compact design. With its very low height, the meter easily adapts to any installation situation.

The ETKD-M / ETWD-M guarantees reliable recording of meter data for individual consumption billing.

The modulator disc enables electronic, non-reactive scanning and is the basis for remote reading of meter data via radio with LoRaWAN® or wM-Bus (according to OMS). A combined M-Bus/pulse module is also possible.



Performance characteristics at a glance

- Single-jet dry dial meter with protected magnetic coupling
- With 8-digit register and modulator disc (≥ 1 l/pulse) for electronic, non-reactive scanning, as a basis for remote readout radio (wM-Bus, LPWAN), M-Bus or pulse
- For horizontal and vertical installation, also for ascending and descending pipes
- Register cap made of UV-resistant polymer plastic
- Available with glass/copper register (IP68)
- Protective cap can optionally be retrofitted
- Brass body according to UBA (Federal Environment Office) list
- Register rotatable 355°
- Operating pressure MAP 16
- Approved in accordance with MID

AMR options

- As standard with communication interface for EDC modules (Electronic Data Capture):
 - EDC LPWAN radio module (868 MHz) for LoRaWAN®
 - EDC wireless M-Bus radio module according to OMS standard (868 MHz), EN 13757-4
 - EDC- combined M-Bus and pulse module

Applications

- For the consumption measurement of cold and unpolluted drinking water or service water up to 30°C (ETKD)
- For the consumption measurement of hot and unpolluted drinking water or service water up to 90°C (ETWD)

Technical data


Permanent flowrate	Q_3	m^3/h	1.6	2.5	2.5	2.5	4
Comparable to permanent flowrate (EEC)	Q_n	m^3/h	1.0	1.5	1.5	1.5	2.5
Attainable measuring range	Q_3/Q_1	R	80H/40V	80H/40V	80H/40V	80H/40V	80H/40V
Standard measuring range ¹	Q_3/Q_1	R	80H/40V	80H/40V	80H/40V	80H/40V	80H/40V
Comparable to metrological class (EEC)	Class	-	B-H/A-V	B-H/A-V	B-H/A-V	B-H/A-V	B-H/A-V
Overload flowrate ²	Q_4	m^3/h	2.00	3.125	3.125	3.125	5
Transitional flowrate ²	Q_2	l/h	32H/64V	50H/100V	50H/100V	50H/100V	80H/160V
Min. flowrate ²	Q_1	l/h	20H/40V	31H/63V	31H/63V	31H/63V	50H/100V
Start-up flow rate	-	l/h	<10	<10	<10	<10	<14
Display range	min.	l	0.02	0.02	0.02	0.02	0.02
	max.	m^3	99,999.999	99,999.999	99,999.999	99,999.999	99,999.999
Temperature range	-	$^{\circ}\text{C}$	0.1 - 30 30 - 90	0.1 - 30 30 - 90	0.1 - 30 30 - 90	0.1 - 30 30 - 90	0.1 - 30 30 - 90
Operating pressure	MAP	bar	16	16	16	16	16
Pulse value	-	l/pulse	1	1	1	1	1
Pressure loss class at Q_3	Δp	bar	0.63	0.63	0.63	0.63	0.63
Mechanical environmental condition	-	-	M1	M1	M1	M1	M1
Climatic condition ³	-	$^{\circ}\text{C}$	5 - 70	5 - 70	5 - 70	5 - 70	5 - 70
Flow profile sensitivity	-	-	U0/D0	U0/D0	U0/D0	U0/D0	U0/D0

Dimensions and weights:


Nominal diameter	DN	mm	15	15	15	20	20
		inch	$\frac{1}{2}$ " ($\frac{7}{8}$ " ⁴)	$\frac{1}{2}$ "	$\frac{1}{2}$ " ($\frac{7}{8}$ " ⁴)	$\frac{3}{4}$ "	$\frac{3}{4}$ "
Overall length	L2	mm	110/115/130	80	110/115/130	130	130
Overall length with connectors approx.	L1	mm	190/195/200	160	190/195/200	226	226
Thread meter G x B	D1	inch	$\frac{3}{4}$ "	$\frac{3}{4}$ "	$\frac{3}{4}$ "	1"	1"
Thread connector	D2	inch	$\frac{1}{2}$ "	$\frac{1}{2}$ "	$\frac{1}{2}$ "	$\frac{3}{4}$ "	$\frac{3}{4}$ "
Width approx.	B	mm	66	66	66	66	66
Height approx.	H1	mm	77	77	77	80	80
Weight approx.	-	kg	0.43/0.44/0.46	0.42	0.43/0.44/0.46	0.57	0.57

¹ Other measuring ranges (R) on request² The data refers to the standard measuring range³ Condensation possible⁴ Thread $\frac{7}{8}$ " on request


Attention: not all versions are available in all markets

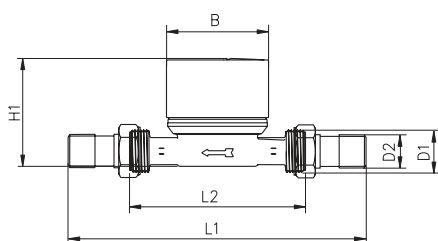

Dimensions

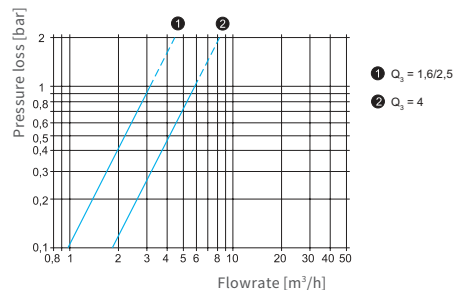

Pressure loss curve

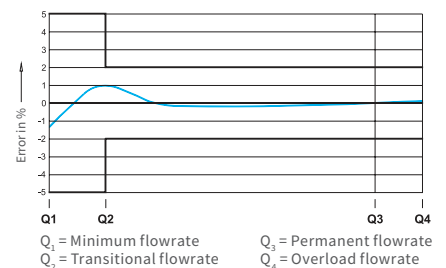

Typical error curve

ZENNER International GmbH & Co. KG

Römerstadt 6 | 66121 Saarbrücken | Germany

Phone +49 681 99 676-0
Fax +49 681 99 676-3100

E-mail info@zenner.com
Internet www.zenner.com